


FN FNS, FNX VORTEX VIPER/VENOM SIGHT MOUNT - EGW SIGHT MOUNT FOR VORTEX VIPER/VENOM FITS FN/FNS/FNX BLACK

[Optics & Mounting](#) > [Rings, Mounts & Bases](#) > [Handgun Bases](#)

EGW red dot sights are meant to be installed from the left to the right (with the muzzle facing forward). The dovetail has a progressive taper to allow for easier install. Simply remove the rear sight on your gun and replace it with EGW mount in order to mount your Vortex Viper/Venom, Burris FastFire, or Docter red-dot sight. You can take the mount off and replace your rear sight at any time. Mounting hardware included. Installation Instructions Remove the rear sight* Install the EGW Sight Mount in the dovetail Tighten set screw (if applicable) Place the red dot sight on the EGW Sight Mount (placing a small piece of paper between the red dot sight and the sight mount will make for easier removal and will keep Loctite off of the red dot sight.) Apply blue Loctite to the provided mounting screws Torque mounting screws to 15in/lbs 2 Button Head Cap Screws - Provided for Vortex Viper and Venom Sights 2 Flat Head Cap Screws - Provided for Burris FastFire and Docter Sights The screws that are included with this mount require a 5/64" allen wrench for installation. Modification of your firearm may nullify the manufacturer's warranty. This product should be installed and checked by a qualified gunsmith. No liability is expressed or implied for damage or injury which may result from improper installation or use of this product. This mount will not work with FN FNP or FN 5.7.

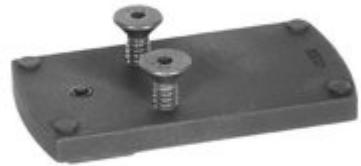

Attributes

- Name: [EGW SIGHT MOUNT FOR VORTEX VIPER/VENOM FITS FN/FNS/FNX BLACK](#)
- Manufacturer: [EGW](#)
- Product no.: 296000656
- Mfr. No.: 49304
- Colour: Black
- Material: Aluminum
- Model: FNS,FNX
- Number of Bases: 1-Piece
- Style: Tactical
- Weapon type: FN
- Delivery weight: 0.045kg
- Shipping height: 25mm
- Shipping width: 76mm
- Shipping length: 140mm
- UPC: 841370114528

Item details

Made in USA

Table of Contents

- Startpage
- FN FNS, FNX Vortex Viper/Venom Sight Mount Safety Instruction Guide
- About Us

FN FNS, FNX Vortex Viper/Venom Sight Mount Safety Instruction Guide

Introduction

Thank you for choosing the FN FNS, FNX Vortex Viper/Venom Sight Mount. This guide provides essential safety instructions and installation guidelines to ensure the safe and effective use of your sight mount. Please read this document carefully before installation and use.

General Safety Guidelines

- Always ensure that the firearm is unloaded before installing or removing the sight mount.
- Handle all firearms with care and in accordance with local laws and regulations.
- Keep the sight mount and all firearms out of reach of children and unauthorized users.
- Regularly inspect the sight mount for signs of wear or damage. Do not use if damaged.
- Use the sight mount only with compatible red dot sights as specified in the product description.
- Modification of your firearm may void the manufacturer's warranty.

Specific Safety Precautions for Use

- Ensure that the firearm is pointed in a safe direction at all times during installation and use.
- Do not attempt to install the sight mount if you are unsure of the process. Consult a qualified gunsmith for assistance.
- Use the provided mounting hardware only; do not substitute with other screws or fasteners.
- Apply blue Loctite to the mounting screws to prevent loosening during use.
- Follow the torque specifications provided to avoid overtightening, which may damage the mount or firearm.
- If you experience any issues with the sight mount, discontinue use immediately and seek professional assistance.

Instructions for Installation and Usage

1. Remove the Rear Sight

- Ensure the firearm is unloaded.
- Carefully remove the rear sight from your firearm.

2. Install the EGW Sight Mount

- Align the EGW Sight Mount in the dovetail of your firearm.
- Tighten the set screw (if applicable) to secure the mount.

3. Attach the Red Dot Sight

- Place the red dot sight onto the EGW Sight Mount.
- For easier removal, place a small piece of paper between the red dot sight and the mount to keep Loctite off the sight.

4. Secure the Mounting Screws

- Apply blue Loctite to the provided mounting screws.
- Torque the mounting screws to 15 in/lbs.
- Use the 5/64" allen wrench for installation.

5. Final Checks

- Ensure all screws are tightened securely.
- Check that the red dot sight is properly aligned and functional.

Disposal Instructions

- Dispose of the sight mount and any packaging materials in accordance with local regulations.
- Do not dispose of electronic components in regular household waste. Check for recycling programs in your area.

Contact Information for Further Support

For any safety inquiries or support regarding the FN FNS, FNX Vortex Viper/Venom Sight Mount, please consult your local dealer or a qualified gunsmith.

Thank you for your attention to these safety guidelines. Your safety and satisfaction are our top priorities.

About Us

Brownells UK

Brownells UK - World's Largest Supplier of Gun Parts, Gunsmith Tools & Shooting Accessories

Unit 1, Laughing Dog Industrial Estate
London Road
Rugby
Warwickshire
CV23 9LP

www.brownells.co.uk