


RUGER AUTO VORTEX VIPER/VENOM SIGHT MOUNT - EGW SIGHT MOUNT FOR VORTEX VIPER/VENOM FITS RUGER AUTO BLACK

[Optics & Mounting](#) > [Rings, Mounts & Bases](#) > [Handgun Bases](#)

EGW red dot sights are meant to be installed from the left to the right (with the muzzle facing forward). The dovetail has a progressive taper to allow for easier install. Simply remove the rear sight on your gun and replace it with EGW mount in order to mount your Vortex Viper/Venom, Burris FastFire, or Docter red-dot sight. You can take the mount off and replace your rear sight at any time. Mounting hardware included. Installation Instructions Remove the rear sight* Install the EGW Sight Mount in the dovetail Tighten set screw (if applicable) Place the red dot sight on the EGW Sight Mount (placing a small piece of paper between the red dot sight and the sight mount will make for easier removal and will keep Loctite off of the red dot sight.) Apply blue Loctite to the provided mounting screws Torque mounting screws to 15in/lbs 2 Button Head Cap Screws - Provided for Vortex Viper and Venom Sights 2 Flat Head Cap Screws - Provided for Burris FastFire and Docter Sights The screws that are included with this mount require a 5/64" allen wrench for installation. Modification of your firearm may nullify the manufacturer's warranty. This product should be installed and checked by a qualified gunsmith. No liability is expressed or implied for damage or injury which may result from improper installation or use of this product.

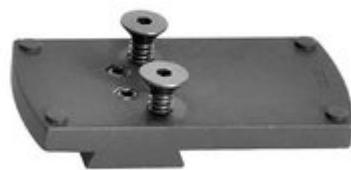

Attributes

- Name: [EGW SIGHT MOUNT FOR VORTEX VIPER/VENOM FITS RUGER AUTO BLACK](#)
- Manufacturer: [EGW](#)
- Product no.: 296000668
- Mfr. No.: 49321
- Colour: Black
- Material: Aluminum
- Model: Mark II,P93,P97,22/45,Mark I,P89,Mark III,P91,P90,P94,P95,P85,Mark IV
- Number of Bases: 1-Piece
- Style: Tactical
- Weapon type: Ruger
- Delivery weight: 0.045kg
- Shipping height: 25mm
- Shipping width: 76mm
- Shipping length: 140mm
- UPC: 841370112951

Item details

Made in USA

Table of Contents

- Startpage
- RUGER AUTO VORTEX VIPER/VENOM SIGHT MOUNT SAFETY INSTRUCTIONS
- About Us

RUGER AUTO VORTEX VIPER/VENOM SIGHT MOUNT SAFETY INSTRUCTIONS

Introduction

Thank you for purchasing the RUGER AUTO VORTEX VIPER/VENOM SIGHT MOUNT. This guide provides important safety information and installation instructions to ensure the safe use of this product. Please read all sections carefully before using the sight mount.

General Safety Guidelines

- Ensure the firearm is unloaded before installation or handling.
- Only use the sight mount with compatible red dot sights as specified in the product description.
- Modification of your firearm may void the manufacturer's warranty. Consult a qualified gunsmith for assistance.
- Always follow local laws and regulations regarding firearm modifications and usage.
- Keep the sight mount and all firearm accessories out of reach of children and unauthorized users.
- Report any unsafe products or accidents to the appropriate authorities.

Specific Safety Precautions for Use

- Use caution when handling tools and hardware during installation.
- Avoid placing any foreign objects between the sight mount and the firearm that may interfere with the installation.
- Ensure that the mounting screws are tightened to the specified torque to prevent loosening during use.
- Regularly inspect the sight mount for wear or damage, and replace it if necessary.
- Be cautious when using blue Loctite; avoid contact with skin and eyes. Follow manufacturer instructions for use.
- If you experience any issues with the sight mount, discontinue use immediately and consult a qualified professional.

Instructions for Installation and Usage

1. Remove the Rear Sight

- Carefully detach the rear sight from your firearm.

2. Install the EGW Sight Mount

- Place the EGW Sight Mount into the dovetail from left to right, ensuring proper alignment.

3. Tighten the Set Screw

- If applicable, tighten the set screw securely to hold the mount in place.

4. Place the Red Dot Sight

- Position the red dot sight on the EGW Sight Mount. For easier removal, place a small piece of paper between the sight and the mount to prevent Loctite from sticking.

5. Apply Blue Loctite

- Apply blue Loctite to the provided mounting screws to ensure a secure fit.

6. Torque Mounting Screws

- Use a torque wrench to tighten the mounting screws to 15 in/lbs.
- Use the following screws as applicable:
 - 2 Button Head Cap Screws for Vortex Viper and Venom Sights
 - 2 Flat Head Cap Screws for Burris FastFire and Docter Sights

7. Check Installation

- Inspect the installation to ensure everything is securely fastened and properly aligned before using the firearm.

Disposal Instructions

- Dispose of any packaging materials in accordance with local regulations.
- If the sight mount is damaged or no longer in use, follow local guidelines for the disposal of metal and plastic components.

Contact Information for Further Support

For any questions or concerns regarding the RUGER AUTO VORTEX VIPER/VENOM SIGHT MOUNT, please consult a qualified gunsmith or contact the manufacturer directly for assistance.

Thank you for your attention to these safety instructions. Your safety and the proper functioning of your firearm are our top priorities. Always prioritize safety when handling firearms and accessories.

About Us

Brownells UK

Brownells UK - World's Largest Supplier of Gun Parts, Gunsmith Tools & Shooting Accessories

Unit 1, Laughing Dog Industrial Estate
London Road
Rugby
Warwickshire
CV23 9LP

www.brownells.co.uk